

APPLICATION & CONSTRUCTION

SIMPLE RETAINING WALLS IN CLAY BRICKWORK


REINFORCEMENT – POCKET WALL CONSTRUCTION

Additional strength and stability can be obtained by introducing reinforced concrete pockets into the construction.

This is achieved by casting into the foundation 10 or 12 mm diameter mild steel reinforcing bars which are accommodated within a vertical slot formed in the rear skin of the wall.

When a suitable height is reached a temporary shutter board completes the box which is filled with well compacted concrete.

Remember to remove all mortar droppings from the bottom of the pocket before placing the shuttering and pouring the concrete.

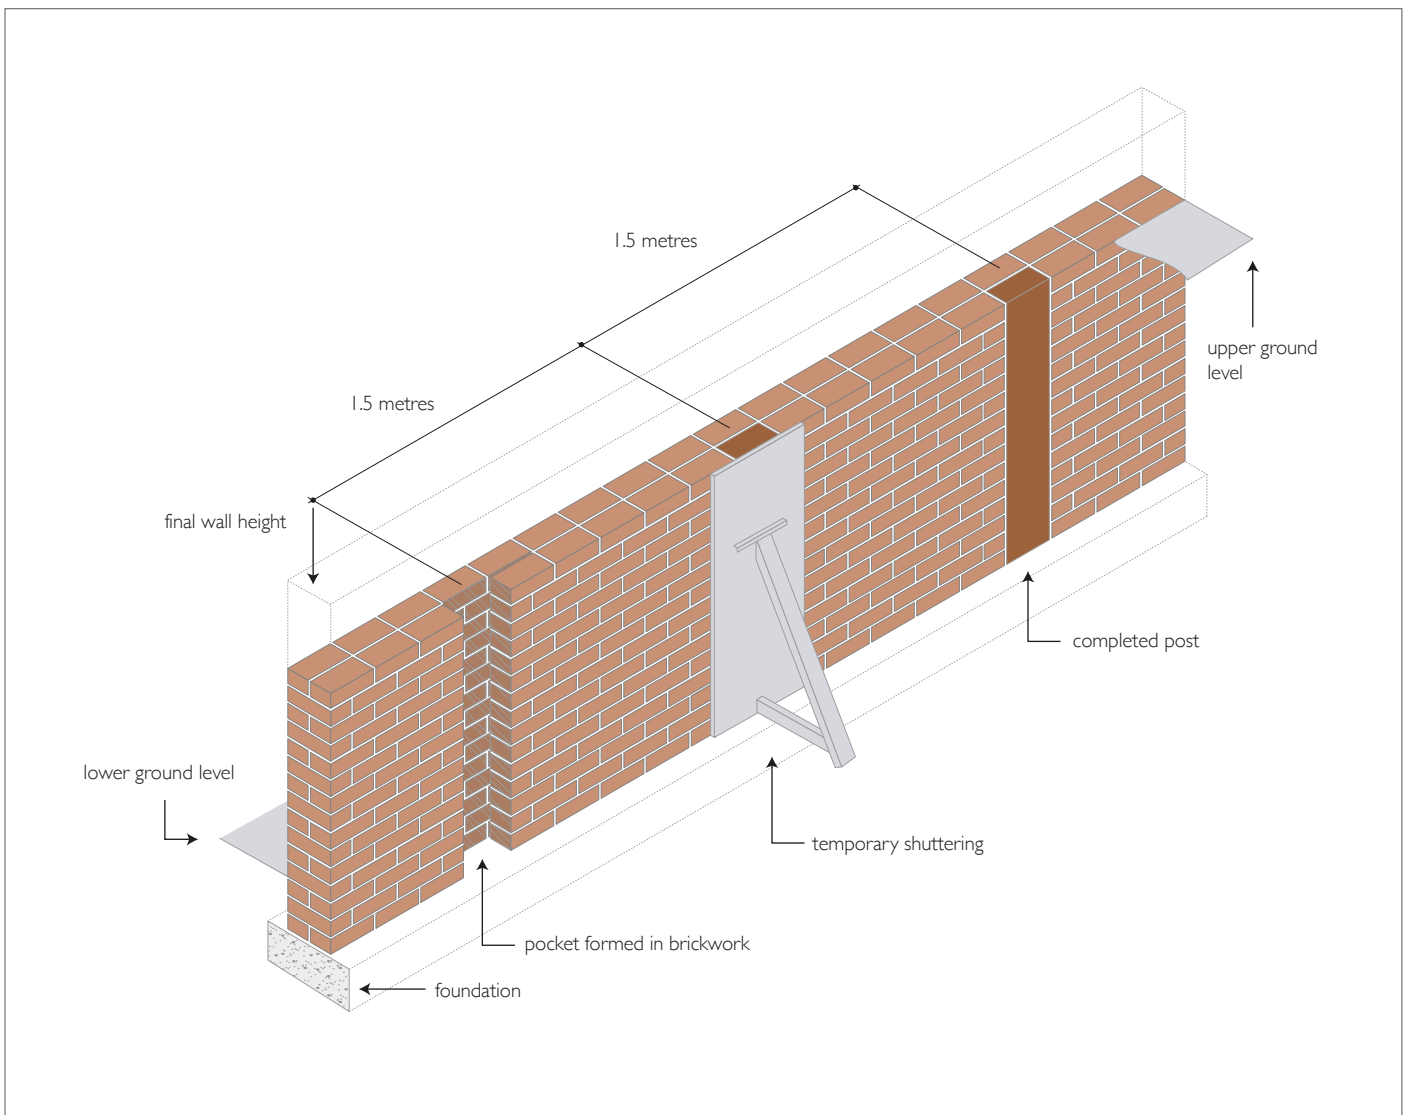

Although the instructions contained in this publication and any other information published by Ibstock Brick Ltd are believed to be accurate at the date of publication, they are strictly for guidance only and Ibstock Brick Ltd accepts no liability in relation to their use or for any losses, howsoever caused. You are responsible for taking all reasonable steps to ensure your use of the product conforms to all applicable health and safety requirements from time to time. If in doubt, please consult appropriately qualified persons. All products sold by Ibstock are sold subject to Ibstock's Terms and Conditions of Sale, a copy of which is available on request.